

NOTES:

1.0 ELECTRICAL SPECIFICATIONS

1.1 FREQUENCY RANGE: DC to 12.4 GHz

1.2 MAXIMUM INPUT POWER:

AT +25°C: 2 WATTS

AT +125°C: 0.5 WATTS

1.3 OPERATING TEMPERATURE RANGE:

-55°C to +125°C

1.4 IMPEDANCE: 50 OHMS

1.5 MAXIMUM VSWR:

DC to 4.0 GHz: 1.07:1


4.0 to 12.4 GHz: 1.12:1

2.0 MARK UNIT AS SHOWN.

REF.: INK-02611-27-14

3.0 DIMENSIONS IN PARENTHESIS

ARE MILLIMETERS.

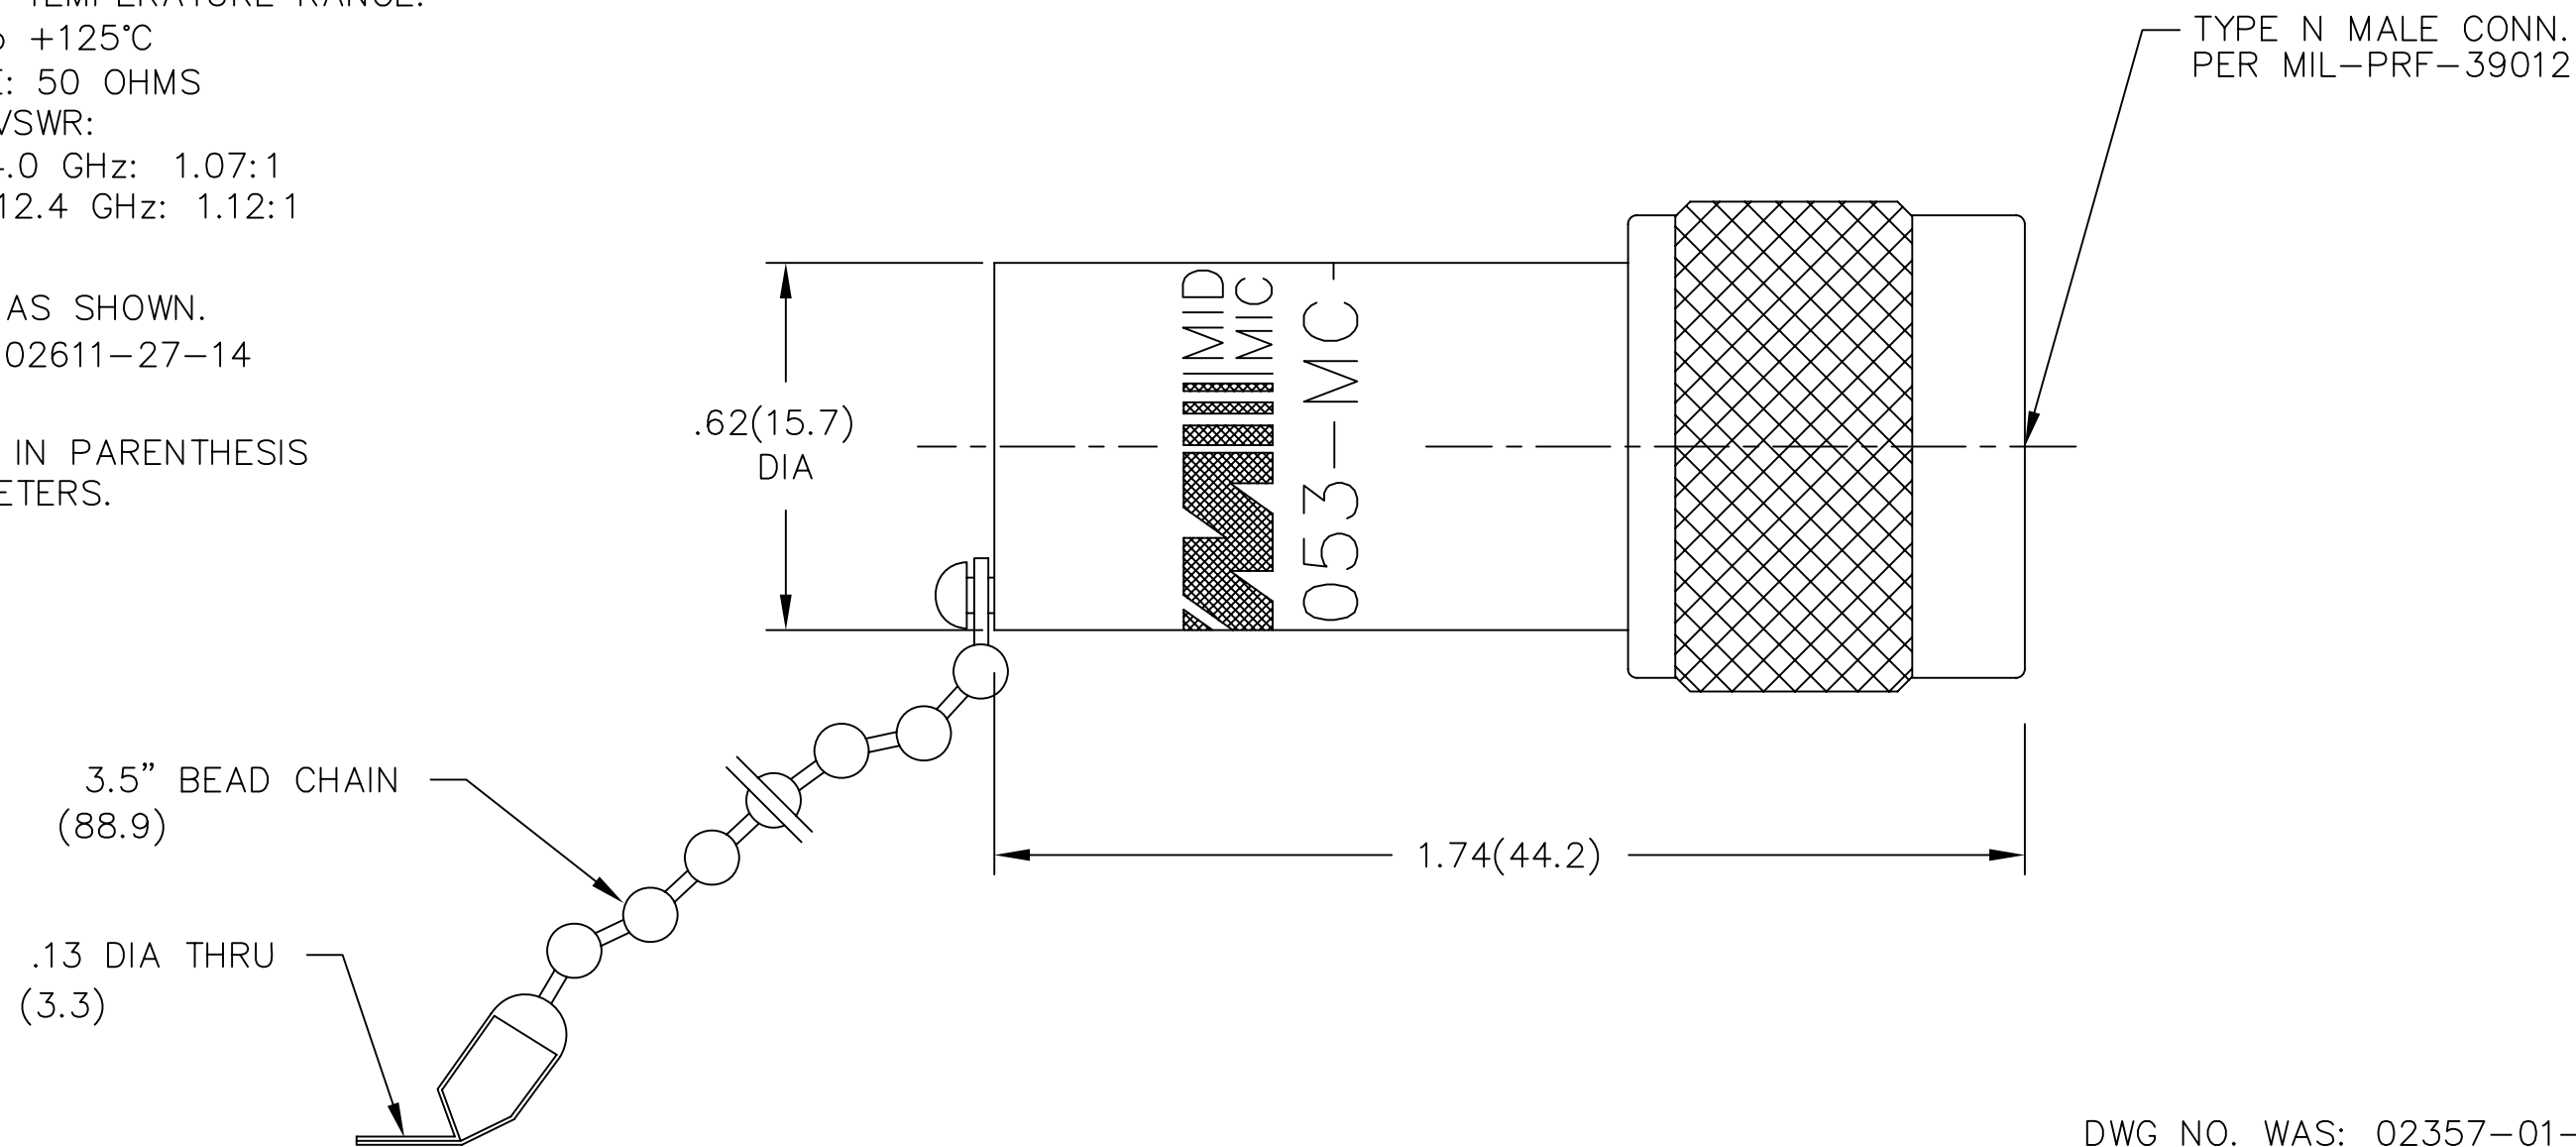

DWG NO. WAS: 02357-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	3/21/92
A	ECR 6545	6/27/89
A1	REDRAW ON CAD - UPDATE MARKING. ADD SPECS.	3/27/92
B	ECN 12868	8/23/93
C	ECN 13622	5/16/94
C1	ADDED TITLEBLOCK	10/26/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°	FSCM NO. 34078		MIDWEST MICROWAVE		
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave			TITLE TERMINATION	
	DRAWN/DATE A.BEATTY 3/27/92	ENG./DATE G.KOZAK 3/30/92	DRAWING NUMBER TRM-2053-MC-NNN-02		
	CHECKED/DATE	APPROVED/DATE	SCALE: 3=1	SHEET 1 of 1	

MODEL NUMBER	TRM-2053-MC-NNN-02
REV.	C1