

Features/Benefits

- Compact size 4.5 x 4.5 mm
- 3.8 mm actuator height
- With or without ground terminal
- RoHS compliant and compatible

Typical Applications

- Consumer products
- Instrumentation
- Computer products
- Hand-held devices

Π

Specification

FUNCTION: Momentary action CONTACT ARRANGEMENT: SPST, N.O. TERMINALS: PC pins

Mechanical

ACTUATION FORCE: 130 grams. LIFE EXPECTANCY: 25,000 operations.

Electrical

CONTACT RATING: 50 mA @ 12 V DC. DIELECTRIC STRENGTH: 250 V AC min. CONTACT RESISTANCE: 100 m Ω max. initial. INSULATION RESISTANCE: 10¹¹ Ω min.

Environmental

OPERATING TEMPERATURE: -40°C to 60°C

NOTE: Specifications listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

Process

SOLDERING: Preheating to 100°C for 45 sec. max. Keep flux flush with top surface of PCB; do not apply to component side of PCB and area where terminals are located. Soldering to 255°C for 5 sec. max. Clean by brushing on solder surface. Do not clean switch with solvents.

Materials


BASE: 6/6 nylon or glass filled polyester (PBT) (UL 94V-0).
ACTUATOR: Polyacetal (UL 94HB).
COVER PLATE: PTS453S: Tin-plated brass. PTS453T: Tin alloy.
DOME CONTACTS: Phosphor bronze, silver clad.
STATIONARY CONTACTS: Brass, silver plated.
TERMINALS: Brass, silver plated. Insert molded.

Packaging


Bulk packaging.

How To Order

Our easy build-a-switch concept allows you to mix and match options to create the switch you need. To order, select desired option from each category and place it in the appropriate box.

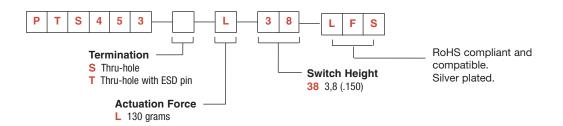

PTS453 Series 4,5 mm Tact Switches

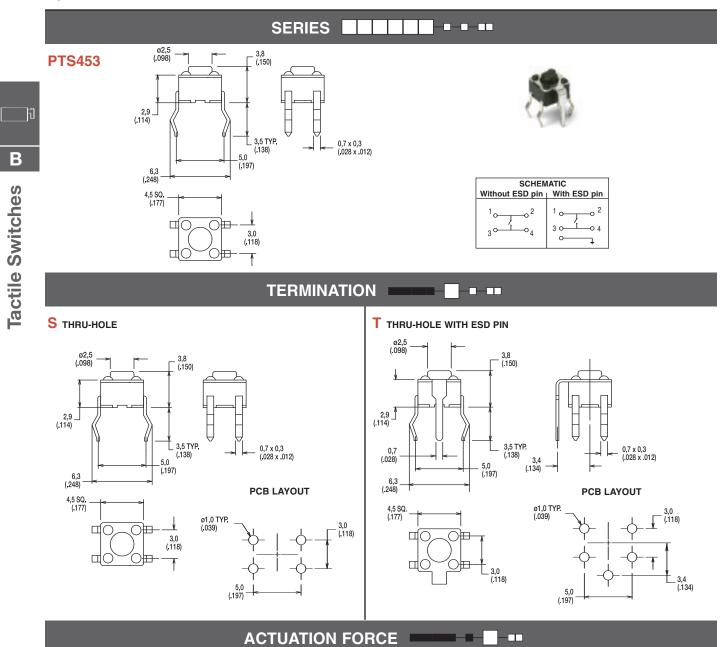


L 130 GRAMS

В

Tactile Switches

SWITCH HEIGHT

38 3,8 (.150)





 \bigcirc First Angle Projection

Dimensions shown in: mm (inch) Specifications and dimensions subject to change