MODEL:

CSC36AC

36-Device AC Charging Station Cart







2-Zone Charging



250 lb. Load Rating



Sturdy Steel Construction



Locking Doors

P



Adjustable Storag Shelf Dividers



Ventilated for Ample Airflow

Α


- A Laminate Desktop Surface
- **B** Reversible Handle
- Convenience Outlets and LED Status Indicators
- Power Cord Manager
- **E** Power Cord Access Hole
- Corner Safety Bumpers (6 Total)
- G Storage Shelves with Removable Dividers*
- H Locking Front Door
- Swivel Locking Casters
- Cat6 RJ45 Pass Through
- K Kev
- Charging Timer Unit (Charges 1 Zone/Hour)
- M 10 ft. Power Cord with 5-15P Plug
- N Power Brick Storage Baskets (Divided into 2 Zones)
- 18-Outlet
 AC Power
 Distribution
 Units** (2 Total)
- P Locking Rear Door
- *Each storage shelf is divided into two zones (Red and Blue). The device spaces for each zone are numbered.
- **Each of the charger unit's outlets are organized in 3 groups of 6 outlets per zone.



Specifications

Operating Temperature

Operating Humidity

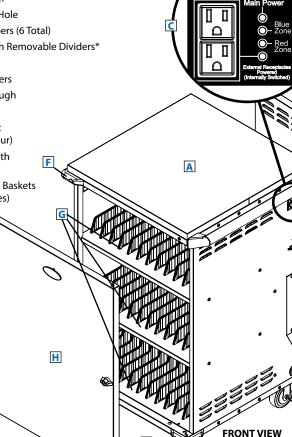

 Locking steel cabinet wth charging, secure storage and cord management for up to 36 Ultrabooks, tablets and other devices

REAR VIEW

- Supports iPad®, Android™, Surface™ and Kindle tablets
- Adjustable/removable storage shelf dividers accommodate thicker devices
- Door locks with included keys prevent device theft, damage or tampering

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS




1111 W. 35th Street Chicago, IL 60609 USA 773.869.1234 www.tripplite.com

Model CSC36AC Cabinet Dimensions (H x W x D) 40.03 x 24.30 x 23.56 in. / 1017 x 617 x 598 mm **Unit Weight** 110.23 lb. / 50 kg **Load Capacity** 250 lb. / 113 kg **AC** Receptacles Power Distribution Units: 36 x 5-15R (Divided into Two Zones) **External Convenience Outlets:** 2 x 5-15 R (Operated via the Charging Timer Unit Switch) **Internal Outlet:** 1 x 5-15R (Reserved for Future Expansion) Input: 120V AC, 50/60 Hz, 12 Amps **Power Requirement**

32° to 104° F (0° to 40° C)

5 to 95% RH, Non-Condensing

*The load rating includes the combined weight of the unit and installed equipment. The unit must be mounted to a stable surface with user-supplied anchors capable of bearing the full load.

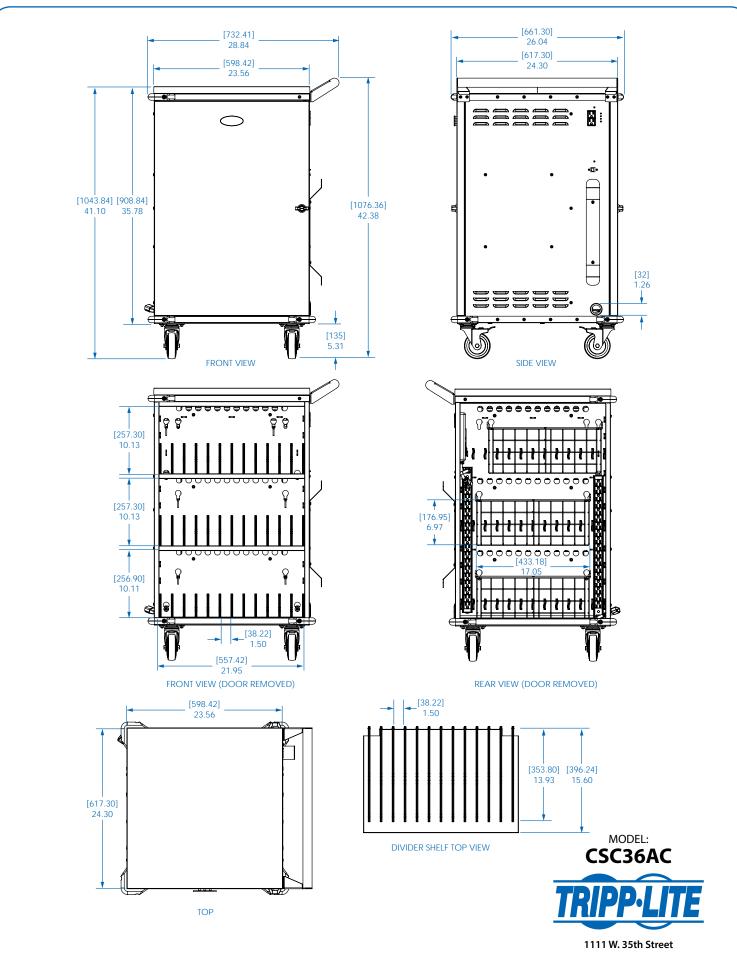

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Photos and illustrations may differ slightly from actual products.

Chicago, IL 60609 USA 773.869.1234 www.tripplite.com