


Number of contacts

# 64

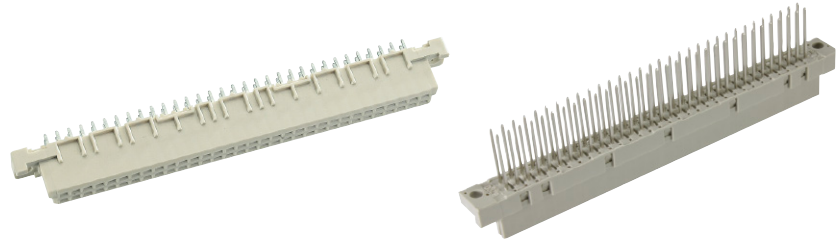

Female connectors

DIN Signal  
up to 2 A

Identification	No. of contacts	Contact arrangement	Part number 3	Performance levels according to IEC 60603-2. Explanation chapter 00	
				2	1
Female connector with solder pins 2.9 mm	64		Performance level 3 on request	09 02 264 6824 09 02 464 6824 <sup>b)</sup> 09 02 764 6824 <sup>c)</sup>	09 02 264 2824
	64			09 02 264 6841 <sup>d)</sup>	
Female connector with solder pins 4.5 mm	64			09 02 264 6825 09 02 264 6825 222 <sup>f)</sup> 09 02 464 6825 <sup>b)</sup> 09 02 764 6825 <sup>c)</sup>	09 02 264 2825
	64			09 02 264 6829 <sup>d)</sup>	
Female connector with solder pins 13 mm	64			09 02 264 6421	
Female connector with press-in pins 4.5 mm	64			09 02 264 6850 09 02 264 6850 222 <sup>f)</sup>	09 02 264 2850
Female connector with press-in pins 13 mm	64			09 02 264 6861 <sup>a)</sup>	
Female connector with wrap posts <sup>1)</sup> 13 mm	64			09 02 264 6821	
Female connector with solder lugs 5.5 mm	64		09 02 264 6823		

01  
12

<sup>1)</sup> To be used only for wire wrap termination

<sup>a)</sup> Contacts for rear interfacing selectively gold plated (performance level 3)

<sup>b)</sup> Connectors with snap-in clips see chapter 00

<sup>c)</sup> Connectors with coding see chapter 00

<sup>d)</sup> CTI > 400

<sup>f)</sup> Railway classification NFF 16-101, Smoke index: F1, Flammability class: I2  
Other contact arrangements on request